

Solar Modules

N-TYPE TOPCON

EXTREME 144X 560 - 600 Wp

BIFACIAL (DUAL GLASS)

Smart: High module efficiency with
144X half-cut Mono crystalline Bi-facial TopCon Solar Cell

Modern: Processed on state-of the-art technology production lines

Dependable: Use of highest quality raw materials coupled with
rigorous in-house testing

Versatile: Suitable for Utility, Rooftop, and other general
applications

PRODUCT CERTIFICATES

 IS 14286 BIS Qualification	 IECEE CB Scheme	 IEC 61215 Design Qualification	 IEC 61730-1 / 2 Safety Qualification
 ISO 9001 Certified Mfg. Process	 ISO 14001 Environmental Mgt. System	 ISO 45001 Health & Safety Mgt. System	 European Conformity

MADE IN INDIA

30 YEARS Linear Performance warranty*

12 YEARS Product warranty on materials
and workmanship**

PRODUCT | KEY FEATURES



OUTPUT
Up to 600 Wp



EFFICIENCY
UP TO 23.26%



TEMPERATURE
COEFFICIENT -0.29 %/°C



WARRANTY
12-year of product
30-year of power output

Mahindra Solarize Extreme 144 Bi-Facial Gain @ Different Albedo (%)

	Pm (Wp)	Vmp (V)	Imp (A)	Voc (V)	Isc (A)	Efficiency (%)	Pm (Wp)	Vmp (V)	Imp (A)	Voc (V)	Isc (A)	Efficiency (%)
Front @STC	560	42.65	13.14	52.02	13.69	21.71	565	42.87	13.19	52.30	13.75	21.90
5%	588	42.65	13.79	52.02	14.34	22.79	593.25	42.87	13.84	52.30	14.39	23.00
10%	616	42.65	14.44	52.02	14.99	23.88	621.5	42.87	14.50	52.30	15.05	24.09
20%	672	42.65	15.76	52.02	16.31	26.05	678	42.87	15.82	52.30	16.37	26.28
Front @STC	570	43.05	13.24	52.50	13.80	22.09	575	43.28	13.29	52.78	13.85	22.29
5%	598.5	43.05	13.90	52.50	14.45	23.20	603.75	43.28	13.95	52.78	14.50	23.40
10%	627	43.05	14.56	52.50	15.12	24.30	632.5	43.28	14.61	52.78	15.17	24.52
20%	684	43.05	15.89	52.50	16.44	26.51	690	43.28	15.94	52.78	16.50	26.75
Front @STC	580	43.50	13.34	53.03	13.89	22.48	585	43.74	13.38	53.27	13.93	22.68
5%	609	43.50	14.00	53.03	14.55	23.61	614.25	43.74	14.04	53.27	14.59	23.81
10%	638	43.50	14.67	53.03	15.21	24.73	643.5	43.74	14.71	53.27	15.26	24.94
20%	696	43.50	16.00	53.03	16.55	26.98	702	43.74	16.05	53.27	16.59	27.21
Front @STC	590	43.93	13.44	53.51	13.97	22.87	595	44.16	13.48	53.75	14.01	23.06
5%	619.5	43.93	14.10	53.51	14.63	24.01	624.75	44.16	14.15	53.75	14.67	24.22
10%	649	43.93	14.77	53.51	15.30	25.16	654.5	44.16	14.82	53.75	15.35	25.37
20%	708	43.93	16.12	53.51	16.64	27.44	714	44.16	16.17	53.75	16.69	27.68


NOCT (Wp) at 45 ± 2 °C @800 W/m²

	560	565	570	575	580	585	590	595	600
Pmax (W)	416.77	420.49	424.21	427.93	431.65	435.38	439.10	442.82	446.54
Max. power voltage (Vmp), V	39.01	39.21	39.38	39.58	39.78	40.00	40.18	40.39	40.58
Max. power current (Imp), A	10.69	10.74	10.78	10.82	10.86	10.89	10.94	10.97	11.01
Open circuit voltage (Voc), V	48.37	48.63	48.82	49.08	49.30	49.53	49.76	49.98	50.21
Short circuit current (Isc), A	11.18	11.23	11.27	11.31	11.34	11.38	11.41	11.44	11.47


Bi-faciality factor: 70 ± 5%

Cell Temperature Coefficient	Bi-Facial
Open circuit voltage	- 0.25 % / °C
Short circuit current	+0.05 % / °C
Peak power	- 0.29 % / °C

Test uncertainty for Pmax ± 3%
Bi-facial gain subject to mounting structure specifications and albedo % of ground

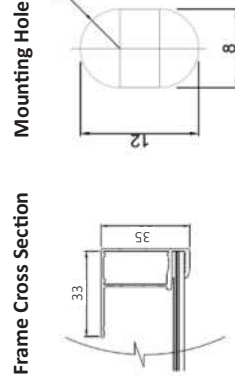


Module Dimension Diagram (mm)

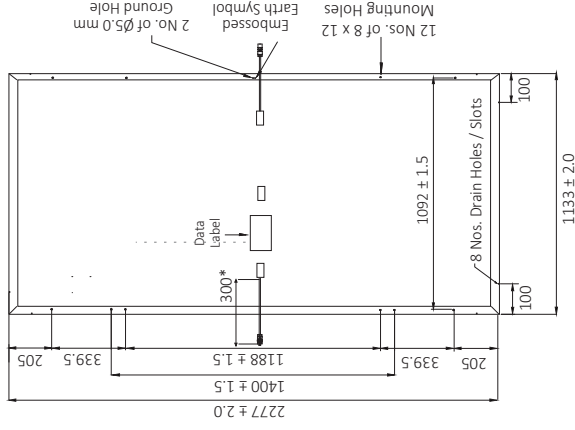


IV Curves

Cell temperature sensitivity chart are for 585 WP



Incident irradiance sensitivity chart are for 585 WP



- Please refer to the installation manual for detailed information.

* Due to continuous product updation, specifications may change without notice. Kindly refer to the website for latest information: www.mahindrasolarize.com

* Recycle Responsibility/Mahindra Solarize recommends recycling in accordance with local government e-waste notifications.